

CENTRAL ASIAN JOURNAL OF THEORETICAL AND APPLIED SCIENCES

Volume: 03 Issue: 05 | May 2022 ISSN: 2660-5317

The Effect of Multiplicity of Carrier Circulation on the Efficiency of Single-Contour Thermoisiphon Systems of Sollar Hot-Water Supply

Ma'murjon Muxtorovich Ismailov, Ixtiyor Raxmatovich Xolmatov

Ferghana Polytechnic Institute, Ferghana, 86 Ferghana str., 150107, Uzbekistan

ismoilov_2722262@mail.ru

Received 26th Mar 2022, Accepted 15th Apr 2022, Online 29th May 2022

Abstract: The article deals with the optimization of circuit solutions and operational parameters in order to increase the efficiency of solar heat supply systems equipped with flat solar collectors.

Keywords: solar collectors, solar water heating device, comparable costs, heat production, operating efficiency.

INTRODUCTION

The heat carrier circulation multiplicity effect on one-contour thermosiphon systems of solar hot-water supply is investigated. It is shown that the number of circulation cycles in such systems has practically no influence on the daily productivity of a solar collector.

Notation

- C_p - specific heat capacity, J/kg °C;
E - density of solar radiation flux in the collector plane, W/m²;
F̄ - efficiency of solar collector,
g_{1,2} - water mass flow rates through the collector at single-and multiple- heating regimes, kg/m² s;
M - specific capacity of the accumulator tank, kg/m²;
n - multiplicity of circulation (number of cycles);
Q - specific heat production of solar collector, J/m²;
t - temperature, °C;
U_L - total coefficient of thermal losses in solar collector, W/m²·°C
(τL) - optical efficiency.

One-contour thermosiphon systems of solar hot-water supply can operate in two principally different regimes: with single and multiple heating of water in solar collectors (SC) [1]. Multiple heating is characterized by low temperature drop (about 10 °C) on the solar collector. This circumstance essentially reduces the operational quality of the thermosiphon system due to the necessity to simultaneously heat the

entire volume of water in the accumulator tank. Nonetheless, the method is widely used in practice because the circulation of the heat carrier in the solar contour under natural pressure is very reliable.

Under single heating the water from the accumulator tank passes through the SC once a day but at a large temperature drop (about 20-30 °C). This regime is advantageous because of the low temperature of the water arriving at the solar collector while a flow with the required temperature is obtained at its outlet. This ensures higher serviceability and lower mean daily temperature of the collector and, all other conditions being equal, raises the available natural pressure in the solar contour, which makes it possible to raise the unit production of the installation [2]. The single heating operation mode is nevertheless seldom used because the estimates of its efficiency are rather contradictory [3,4].

The aim of this work is to define the influence of multiple circulation of the heat carrier on the efficiency of single-contour thermosiphon systems.

Greater multiplicity of circulation in a thermosiphon system affects the daily efficiency in different ways. Thus, on one hand a greater number of cycles intensifies heat abstraction from the collector due to greater specific consumption of the heat carrier, and on the other hand it implies higher temperatures of the water feeding the collector. It is difficult to circulation multiplicity on the efficiency of thermosiphon system by comparing its daily production under the single- and multiple-heating regimes.

Suppose that the same amount of water with mass M and initial temperature t_{in} is heated in the SC during a day which differend mass flow rates g_1 and g_2 (Fig. 1), g_1 being the mass flow rate for which the entire mass M passes through the collector once during the operation time $\Delta\tau$, while for g_2 it circulates n times. The finite temperature of the water in the tank t_f is defined by the efficiency of SC operation in the compared variants. We assume that the SC works under stationary conditions and neglect the heat losses in the pipe lines and accumulator tank. We aslo suppose that for multiple heating the temperature separation in water layers is ideal.

For the thus stated problem the daily production of SC under a single-heating regime with mass flow rate g_1 is.

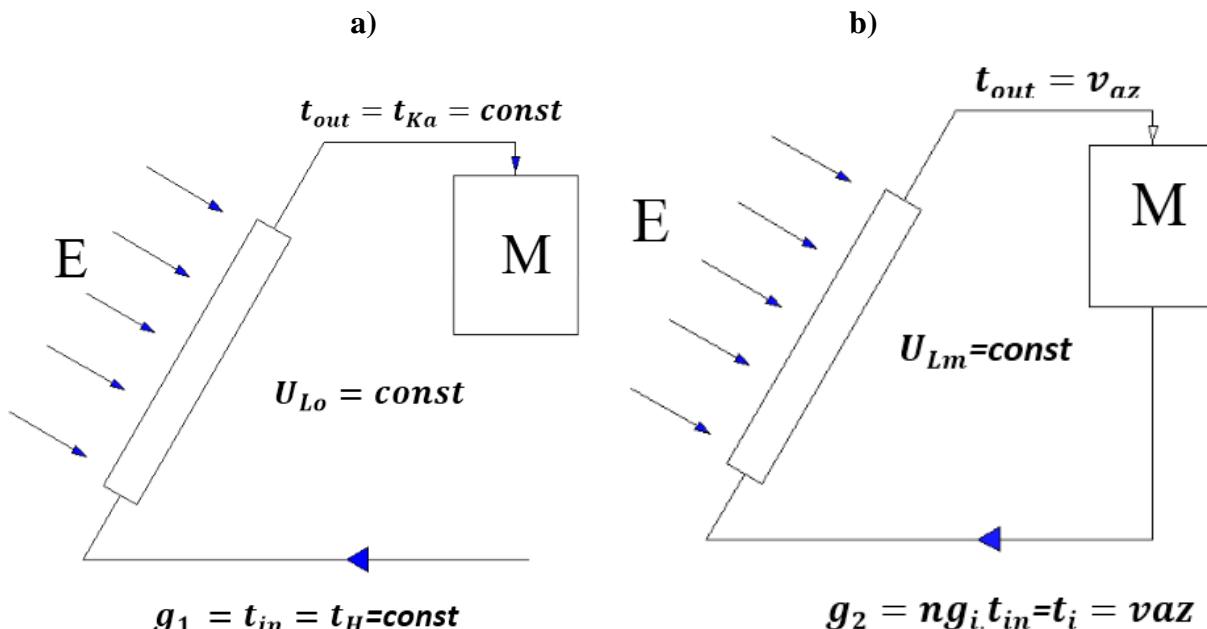


Fig. 1. Diagram of solar collector operation in (a) single -and (b) multiple-heating regimes.

$$Q_0 = \frac{M_{cp}}{U_{Lo}} \left[1 - \exp \left(-\frac{U_{Lo} \cdot F'}{g_1 c_p} \right) \right] [E(\tau\alpha) - U_{Lo}(t_{in} - t_F)], \quad (1)$$

where $M=g_1\Delta\tau$ is the specific capacity of the accumulator tank in kg/m^2 .

The daily production of heat in SC operating in a multiple-heating regime is defined as the sum of the heats Q produced during n cycles of single heating with mass flow rate $g_2=ng_1$, i.e.

$$Q_m = \sum_{i=1}^n Q_i = \frac{M_{cp}}{U_{Lo}} \left[1 - \exp \left(-\frac{U_{Lm} \cdot F'}{ng_1 c_p} \right) \right] \sum_{i=1}^n [E(\tau\alpha) - U_{Lm}(t_{in} - t_{out})], \quad (2)$$

or, taking into account

$$t_i = t_{in} + \frac{1}{U_{Lm}} \left[E(\tau\alpha) - U_{Lm}(t_{in} - t_{out}) \left[1 - \exp[(i-L)] \left(-\frac{U_{Lm} \cdot F'}{ng_1 c_p} \right) \right] \right], \quad (3)$$

we find

$$Q_m = \frac{M_{cp}}{U_{Lm}} \left[1 - \exp \left(-\frac{U_{Lm} \cdot F'}{g_1 c_p} \right) \right] [E(\tau\alpha) - U_{Lm}(t_{in} - t_{out})]. \quad (4)$$

Dividing (1) by (4) we get

$$\frac{Q_o}{Q_m} = \frac{U_{Lm} [1 - \exp(-U_{Lo} \cdot F') / g_1 c_p] [E(\tau\alpha) - U_{Lo}(t_n - t_b)]}{U_{Lo} [1 - \exp(-U_{Lm} \cdot F') / g_1 c_p] [E(\tau\alpha) - U_{Lm}(t_{in} - t_{out})]}. \quad (5)$$

It follows from (5) that the effect of the circulation multiplicity n on the efficiency of SC is only expressed in terms of the total loss coefficient U_L which depends on the mean temperature of the absorption panel, and hence on n . For $U_{Lo}=U_{Lm}$ the number of cycles does not affect the daily production of heat in SC, $Q_0/Q_M=1$.

In order to find U_{Lo} and U_{Lm} we must know the respective mean temperatures of the absorption panel t_{no} and t_{nm} . The latter is dependent on the SC efficiency for single-and multiple-heating regimes, and hence the computation must be carried out by iterations [1]. To make our analysis simpler, we consider the limiting values of U_L in the single-and multiple-heating regimes from 10 to 60 $^{\circ}\text{C}$ using the data from [5]. We can assume that under a single heating with $g_1=0$ the mean temperature of the absorption panel is equal to that at the outlet of the collector, i.e., $t_{no}=t_{out}=60$ $^{\circ}\text{C}$. Then for a common SC under the most unfavorable climatic conditions in the summer period ($W_a=3.9-4.2 \text{ m/s}$; $t_a=12-20$ $^{\circ}\text{C}$) $U_{Lo}=8.9 \text{ W/m}^2 \cdot 0^{\circ}\text{C}$ [5]. For multiple heating with $g_2 \rightarrow \infty$ and $n \rightarrow \infty$ we can assume that $t_{nm}=0.5(t_{in}+t_{out})=35$ $^{\circ}\text{C}$, which means that for the same SC structure $U_{Lm}=8.0 \text{ W/m}^2 \cdot 0^{\circ}\text{C}$. Thus, for g and n the total loss coefficient U_L for both heating regimes from 10 to 60 $^{\circ}\text{C}$ differs by at most 10%.

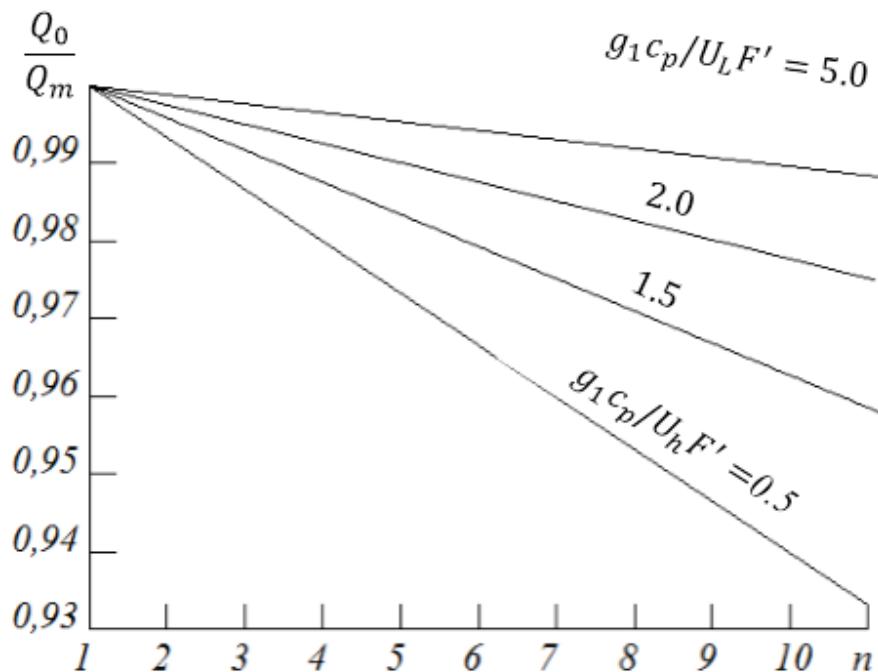


Fig.2. Daily productivity of the collector for single-and heating cycles as a function of circulation multiplicity for different values of the parameter $g_1 c_p / U_L F'$.

We suppose that U_L and t_n are varying linearly and take into account that the first limiting case is valid for $g_1=1-2\text{kg/m}^2\cdot\text{hr}$ and the second for $g_2 \geq 20\text{kg/m}^2\cdot\text{hr}$ [5], i.e., for $n \geq 10$, we can write.

$$U_L = (1.01 - 0.01n) U_{L0} \quad \text{for } 1 \leq n \leq 11 \quad (6)$$

Substituting (6) into (5) and taking $t_{in}=t_{out}=10^0\text{C}$, we find

$$\frac{Q_0}{Q_m} = (1.01 - 0.01n) \frac{1 - \exp(-U_{L0} \cdot F / g_1 c_p)}{1 - \exp[-(1.01 - 0.01n)] U_{L0} \cdot F / g_1 c_p} \quad (7)$$

It follows from Fig. 2 which plots the dependence (7) that the advantages of the multiple-heating regime decrease with the growth of g_1 . For $g_1 c_p > 2U_{L0} \cdot F$ a heating with multiplicity $n=10$ raises the daily heat production of the SC only by 2%. We infer that further increase of g_2 will not essentially rise the heat production of the collector. This fact was also noted in [6, 7]. For small mass flow rates with the parameter $g_1 c_p = 0.5 U_{L0} \cdot F$ (g_1 is approximately 3-4 kg/m $^2\cdot$ hr) a considerable rise in the daily production of SC is observed for $n \geq 5$, i.e., beyond the limiting circulation multiplicity ($n=1.5-3$) actually encountered in thermosiphon systems does not practically affect (the difference being no greater than 1.5%) the daily output of the solar collector.

References

1. J. Duffie and W. Beckman, *Solar Energy Thermal Processes*, Wiley, New York, 1974.
2. Yu.K. Rashidov, *Geliotekhnika [Applied Solar Energy]*, no. 5, pp. 58-60, 1991.
3. J.M. Gordon and Y. Zarmi, *Solar Energy*, vol. 27, 5, pp. 441-442, 1981.
4. P.M. Collares, *Sunworld*, vol. 8, no. 2, pp. 49-51, 63, 1984.
5. Yu.N. Malevskii, Yu.L. Myshko, et al., *Geliotekhnika [Applied Solar Energy]*, no. 4, pp. 50-54, 1980.

6. Xamdamaliyevich S. A., Rahmankulov S. A. "Investigation of heat transfer processes of solar water, air contact collector" //E-Conference Globe. – 2021. – C. 161-165
7. M.D. Rabinovich and A.R.Fert, Geliotekhnika [Applied Solar Energy], no. 2. pp. 39-45, 1980.
8. Abdulkarimov, B. A. (2021). Improve Performance Efficiency As A Result Of Heat Loss Reduction In Solar Air Heater. International Journal of Progressive Sciences and Technologies, 29(1), 505-511.
9. Uktamaliyev, B. I., Abdulkarimov, A. A., & Mamatkarimov, O. O. (2021). Ionic Conductivity and Dielectric Constant of a Solid Polymer Electrolyte Containing Salts Litf2 and Mgtf2. CONVERTER, 2021(7), 897-902.
10. Madaliev, M. E. (2020). Numerical research v t-92 turbulence model for axisymmetric jet flow. Vestnik Yuzhno-Ural'skogo Gosudarstvennogo Universiteta. Seriya " Vychislitel'naya Matematika i Informatika", 9(4), 67-78.
11. Madaliev, M. E. U., Maksudov, R. I., Mullaev, I. I., Abdullaev, B. K., & Haidarov, A. R. (2021). Investigation of the Influence of the Computational Grid for Turbulent Flow. Middle European Scientific Bulletin, 18, 111-118.
12. АБДУЛХАЕВ, З., & МАДРАХИМОВ, М. (2020). Гидротурбиналар ва Насосларда Кавитация Ҳодисаси, Оқибатлари ва Уларни Бартараф Этиш Усуллари. Ўзбекгидроэнергетика" илмий-техник журнали, 4(8), 19-20.
13. Мадрахимов, М. М., Абдулхаев, З. Э., & Ташибулатов, Н. Э. (2019). Фаргона Шаҳар Ер Ости Сизот Сувлари Сатҳини Пасайтириш. Фарғона Политехника Институти Илмий–Техника Журнали, 23(1), 54-58.
14. Мадрахимов, М. М., & Абдулхаев, З. Э. (2019). Насос агрегатини ишга туширишда босимли сув узатгичлардаги ўтиш жараёнларини ҳисоблаш усуслари. Фарғона Политехника Институти Илмий–Техника Журнали, 23(3), 56-60.
15. ugli Mo'minov, O. A., Maqsudov, R. I., & qizi Abdukhalilova, S. B. (2021). Analysis of Convective Finns to Increase the Efficiency of Radiators used in Heating Systems. Middle European Scientific Bulletin, 18, 84-89.
16. Mo'minov, O. A., & O'tbosarov Sh, R. TYPE OF HEATING RADIATORS, PRINCIPLES OF OPERATION AND THEORETICAL ANALYSIS OF THEIR TECHNICAL AND ECONOMIC CHARACTERISTICS.
17. Мадхадимов, М. М., Абдулхаев, З. Э., & Сатторов, А. Х. (2018). Регулирования работы центробежных насосов с изменением частота вращения. Актуальные научные исследования в современном мире, (12-1), 83-88.
18. Сатторов, А. Х., Акрамов, А. А. У., & Абдуразаков, А. М. (2020). Повышение эффективности калорифера, используемого в системе вентиляции. Достижения науки и образования, (5 (59)), 9-12.
19. Jovliev, O. T., Khujakulova, M. K., Usmonova, N. A., & O'tbosarov, S. R. (2021). Modeling the Theory of Liquid Motion Variable on the Way Flow. Middle European Scientific Bulletin, 18, 455-461.
20. Abdulkhaev, Z. E., Abdurazaqov, A. M., & Sattorov, A. M. (2021). Calculation of the Transition Processes in the Pressurized Water Pipes at the Start of the Pump Unit. JournalNX, 7(05), 285-291.

21. Usmonova, N. A. (2021). Structural Characteristics of the Cavern at a Fine Bubbled Stage of Cavitation. Middle European Scientific Bulletin, 18, 95-101.
22. Mirsaidov, M., Nosirov, A., & Nasirov, I. (2020). Spatial forced oscillations of axisymmetric inhomogeneous systems. In E3S Web of Conferences (Vol. 164, p. 02009). EDP Sciences.
23. Arifjanov, A., Otaxonov, M., & Abdulkhaev, Z. (2021). Model of groundwater level control using horizontal drainage. Irrigation and Melioration, 2021(4), 21-26.
24. Mirsaidov, M. M., Nosirov, A. A., & Nasirov, I. A. (2021, May). Modeling of spatial natural oscillations of axisymmetric systems. In Journal of Physics: Conference Series (Vol. 1921, No. 1, p. 012098). IOP Publishing.
25. Абдукаримов, Б. А., Акрамов, А. А. У., & Абдухалилова, Ш. Б. К. (2019). Исследование повышения коэффициента полезного действия солнечных воздухонагревателей. Достижения науки и образования, (2 (43)).
26. Maqsudov, R. I., & qizi Abdukhaliqova, S. B. (2021). Improving Support for the Process of the Thermal Convection Process by Installing. Middle European Scientific Bulletin, 18, 56-59.
27. Erkinjonovich, A. Z., Mamadaliyevich, M. M., O'G'Li, S. M. A., & Egamberdiyevich, T. N. (2021). Farg'ona Shahar Yer Osti Sizot Suvarining Ko'tarilish Muammosi Va Yechimlari. Oriental renaissance: Innovative, educational, natural and social sciences, 1(3), 138-144.
28. Anarbaev, A., Tursunov, O., Zakhidov, R., Kodirov, D., Rakhmatov, A., Toshpulatov, N., ... & Sabirov, E. (2020, December). Calculation the dynamic stability zone of the distribution grid with generating sources based on renewable energy. In IOP Conference Series: Earth and Environmental Science (Vol. 614, No. 1, p. 012004). IOP Publishing.
29. Рашидов, Ю. К., Исломов, М. М., Рашидов, К. Ю., & Файзиев, З. Ф. (2019). Повышение равномерности распределения потока жидкости по подъемным трубам лучепоглощающей теплообменной панели солнечного водонагревательного коллектора листотрубного типа в условиях принудительной циркуляции при действии объёмных сил. In Экологическая, промышленная и энергетическая безопасность-2019 (pp. 1377-1382).
30. Рашидов, Ю. К., Исломов, М. М., Рашидов, К. Ю., & Файзиев, З. Ф. (2019). Определение оптимального количества расчётных слоев многослойного водяного стратификационного аккумулятора теплоты при расчете саморегулирующегося активного элемента. In Экологическая, промышленная и энергетическая безопасность-2019 (pp. 1372-1376).
31. Madraximov, M. M., Abdulkhaev, Z. E., & Orzimatov, J. T. (2021). GIDRAVLIK TARAN QURILMASINING GIDRAVLIK HISOBI. Scientific progress, 2(7), 377-383.
32. Rashidov, Y. K., Orzimatov, J. T., Rashidov, K. Y., & Fayziev, Z. X. (2020). The Method of Hydraulic Calculation of a Heat Exchange Panel of a Solar Water-Heating Collector of a Tube–Tube Type with a Given Nonuniform Distribution of Fluid Flow Along Lifting Pipes. Applied Solar Energy, 56(1), 30-34.
33. Usarov, M., Usarov, D., & Mamatisaev, G. (2021, May). Calculation of a Spatial Model of a Box-Type Structure in the LIRA Design System Using the Finite Difference Method. In International Scientific Siberian Transport Forum (pp. 1267-1275). Springer, Cham.
34. Mirsaidov, M., Usarov, M., & Mamatisaev, G. (2021). Calculation methods for plate and beam elements of box-type structure of building. In E3S Web of Conferences (Vol. 264). EDP Sciences.

35. Худайкулов, С. И., Жовлиев, У. Т., Сайлиев, О. И., & Утбосаров, Ш. Р. (2022). МОДЕЛИРОВАНИЯ ЗАДАЧИ ТУРБУЛЕНТНОГО ТЕЧЕНИЯ СМЕСИ ВЯЗКИХ ЖИДКОСТЕЙ. Барқарорлик ва Етакчи Тадқиқотлар онлайн илмий журнали, 2(1), 405-410.
36. Ishankulovich, K. S. (2022). Modeling The Rotation Of A Turbulent Flow With A Variable Radius. International Journal of Progressive Sciences and Technologies, 31(2), 388-395.
37. Madraximov, M. M., Nurmuxammad, X., & Abdulkhaev, Z. E. (2021, November). Hydraulic Calculation Of Jet Pump Performance Improvement. In International Conference On Multidisciplinary Research And Innovative Technologies (Vol. 2, pp. 20-24).
38. Hamdamalievich, S. A., & Nurmuhammad, H. (2021). Analysis of Heat Transfer of Solar Water Collectors. Middle European Scientific Bulletin, 18, 60-65.
39. Akramovna, U. N., & Ismoilovich, M. R. (2021). Flow Around a Plate at Nonzero Cavitation Numbers. CENTRAL ASIAN JOURNAL OF THEORETICAL & APPLIED SCIENCES, 2(12), 142-146.
40. Madraximov, M., Yunusaliev, E., Abdulhayev, Z., & Akramov, A. (2021). Suyuqlik va gaz mexanikasi fanidan masalalar to'plami. GlobeEdit.
41. Акрамов, А. А., Шарифов, А., Умаров, У. Х., Хокиев, М. К., & Ахмедов, М. Ф. (2020). Эффекты суперпластификаторов в бетонной смеси. Политехнический вестник. Серия: Инженерные исследования, (1), 139-143.
42. Умурзакова, М. А., Усмонов, М. А., & Рахимов, М. Н. (2021). АНАЛОГИЯ РЕЙНОЛЬДСА ПРИ ТЕЧЕНИЯХ В ДИФФУЗОРНО-КОНФУЗОРНЫХ КАНАЛАХ. Экономика и социум, (3-2), 479-486.
43. Madraximov, M. M., Abdulkhaev, Z. E., & ugli Inomjonov, I. I. (2022). Factors Influencing Changes In The Groundwater Level In Fergana. International Journal of Progressive Sciences and Technologies, 30(2), 523-526.